

Silicon Diode

BY9212

12kV/5mA

DATASHEET

OEM – Philips

Source: Philips Databook 1999

Ultra fast high-voltage soft-recovery controlled avalanche rectifier

BY9200 series

FEATURES

- Plastic package
- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- 40% overvoltage allowed during 5 sec
- Guaranteed avalanche energy absorption capability
- Very low reverse recovery time
- Soft-recovery switching characteristics
- Compact construction.

APPLICATIONS

- Colour television and monitors up to 130 kHz (indication)
- High-voltage applications for:
 - multipliers
 - diode-split-transformers (FBT's)

DESCRIPTION

Plastic package, using glass passivation and a high temperature alloyed construction.

This package is hermetically sealed and fatigue free as coefficients of

expansion of all used parts are matched.

The package should be used in an insulating medium such as resin, oil or SF6 gas.

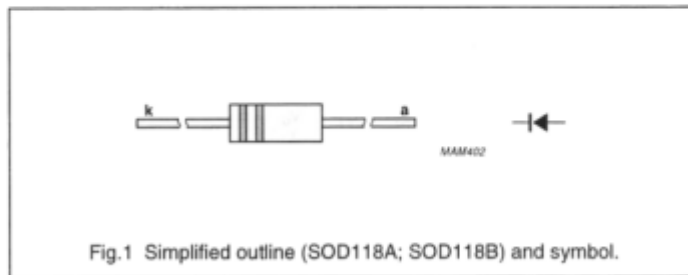


Fig.1 Simplified outline (SOD118A; SOD118B) and symbol.

MARKING

Cathode band colour codes

TYPE NUMBER	PACKAGE CODE	INNER BAND	OUTER BAND
BY9206	SOD118A	green	light blue
BY9208	SOD118A	red	light blue
BY9210	SOD118B	violet	light blue
BY9212	SOD118B	orange	light blue

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{RRM1}	repetitive peak reverse voltage		–	6	kV
	BY9206		–	8	kV
	BY9208		–	10	kV
	BY9212		–	12	kV
V _{RRM2}	repetitive peak reverse voltage	max. 5 sec.	–	8.4	kV
	BY9206		–	11.2	kV
	BY9210		–	14.0	kV
	BY9212		–	16.8	kV

 Ultra fast high-voltage soft-recovery
 controlled avalanche rectifier

BY9200 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$I_{F(AV)}$	average forward current	averaged over any 20 ms period; see Figs 2, 3, 4 and 5			
	BY9206		–	10	mA
	BY9208		–	5	mA
	BY9210		–	5	mA
	BY9212	–	5	mA	
I_{FRM}	repetitive peak forward current	note 1	–	500	mA
T_{stg}	storage temperature		–65	+175	°C
T_j	junction temperature				
	BY9206		–65	+160	°C
	BY9208		–65	+155	°C
	BY9210		–65	+150	°C
	BY9212		–65	+145	°C

Note

1. Withstands peak currents during flash-over in a picture tube.





ELECTRICAL CHARACTERISTICS $T_j = 25\text{ °C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
V_F	forward voltage	$I_F = 10\text{ mA}$; see Figs 6, 7, 8 and 9			
	BY9206		–	18	V
	BY9208		–	22	V
	BY9210		–	28	V
	BY9212	–	36	V	
I_R	reverse current	$V_R = V_{RRM1}$; $T_j = 120\text{ °C}$	–	3	μA
t_{rr}	reverse recovery time	when switched from $I_F = 2\text{ mA}$ to $I_R = 4\text{ mA}$; measured at $I_R = 1\text{ mA}$; see Fig 10	–	< 35	ns
C_d	diode capacitance	$V_R = 0$; $f = 1\text{ MHz}$			
	BY9206		0.34	–	pF
	BY9208		0.29	–	pF
	BY9210		0.27	–	pF
	BY9212	0.23	–	pF	

Ultra fast high-voltage soft-recovery controlled avalanche rectifier





BY9200 series

GRAPHICAL DATA

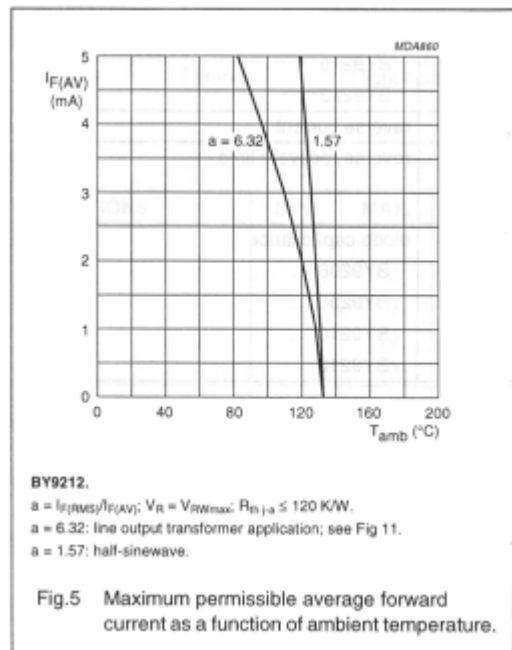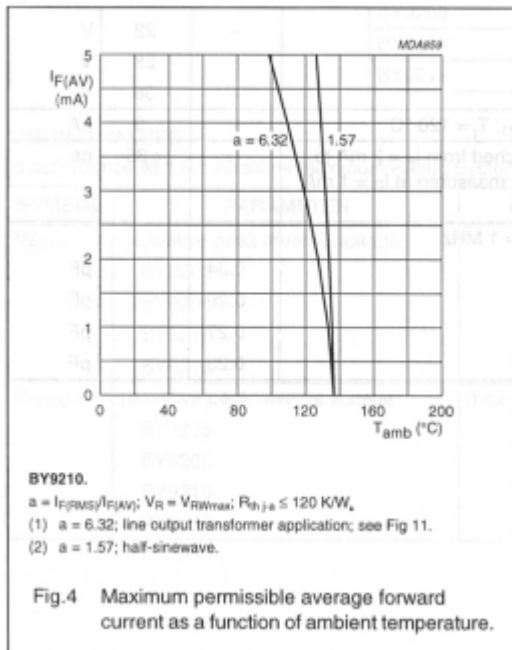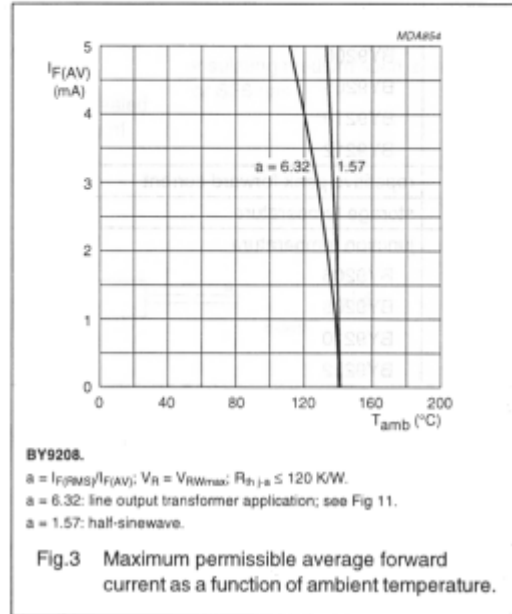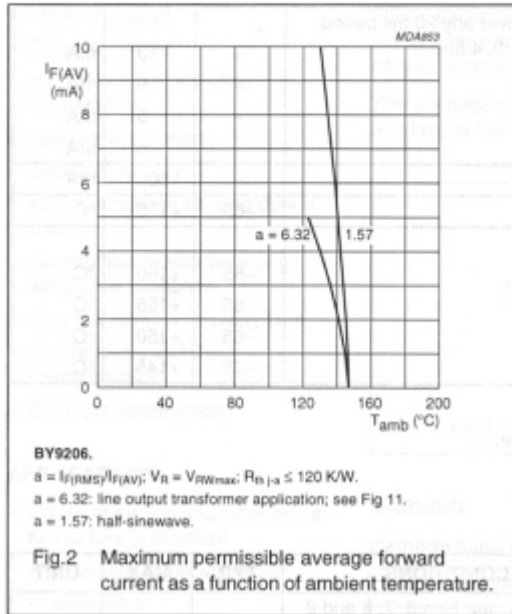


Ultra fast high-voltage soft-recovery
controlled avalanche rectifier

BY9200 series

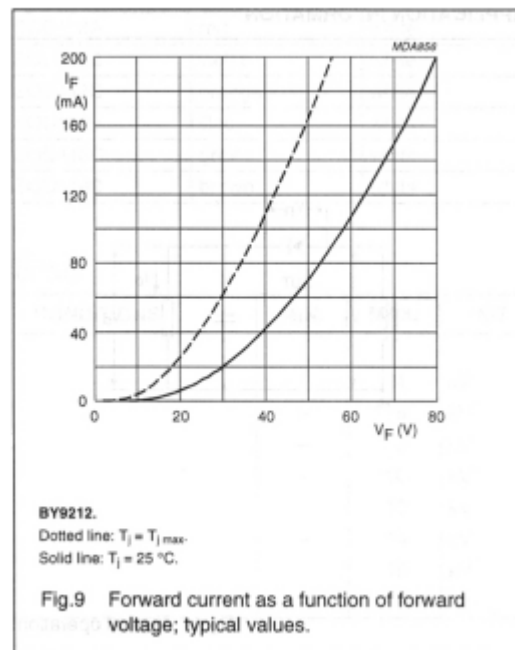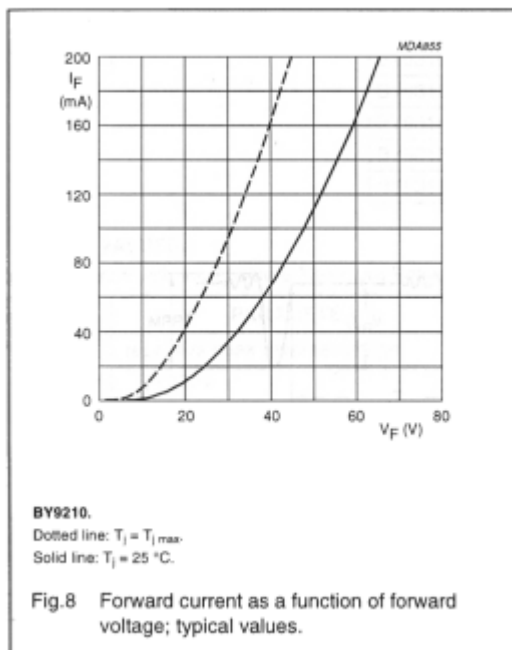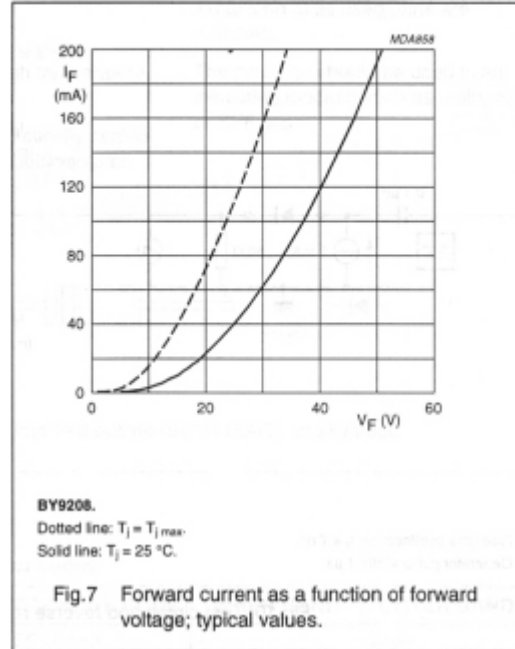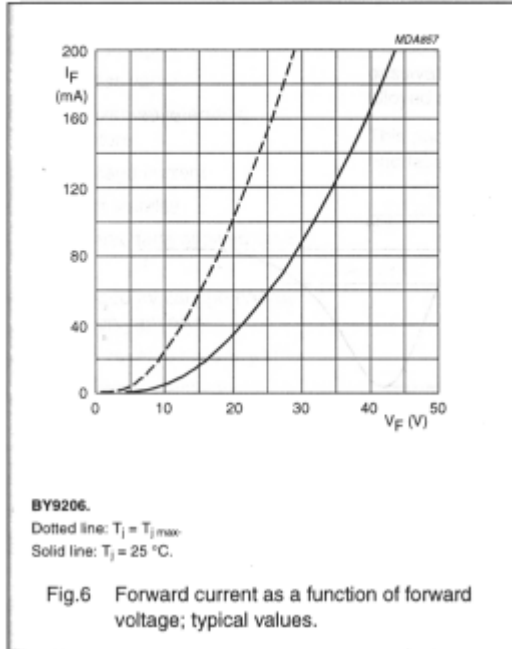

Ultra fast high-voltage soft-recovery
controlled avalanche rectifier

BY9200 series

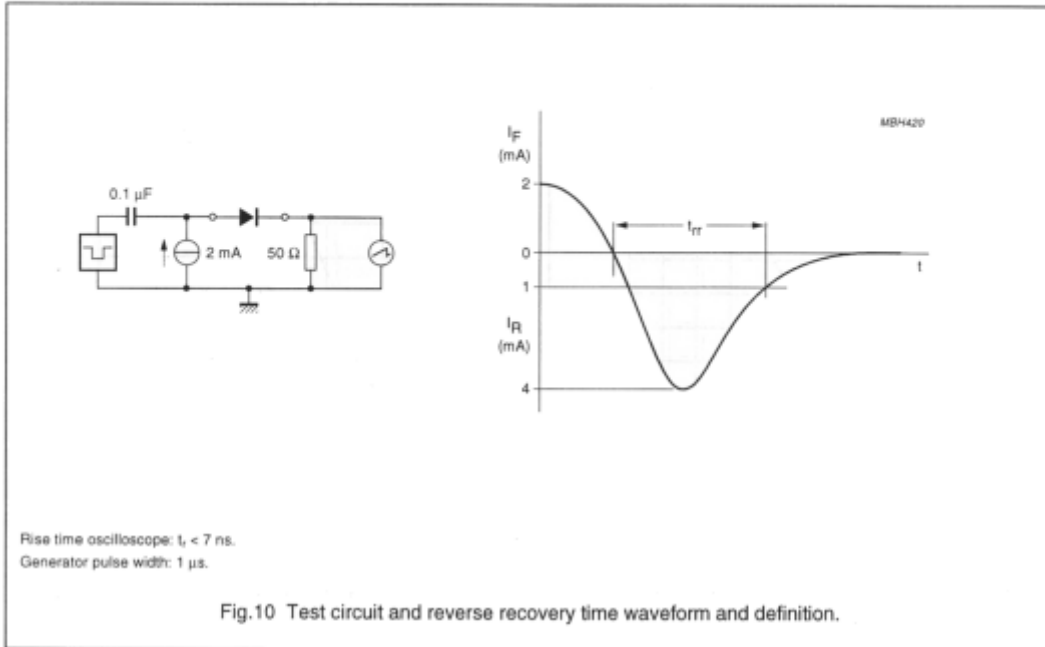

APPLICATION INFORMATION

