

# Silicon Diode

## **CG2**

1400V / 2A

# DATASHEET

from

[www.web-bcs.com](http://www.web-bcs.com)

OEM – General Semiconductor


Source: General Semiconductor Databook 1998

# CG2 AND DG2

## MINIATURE CLAMPER / DAMPER GLASS PASSIVATED RECTIFIER

Reverse Voltage - 1400 to 1500 Volts Forward Current - 2.0 Amperes

**PATENTED\***

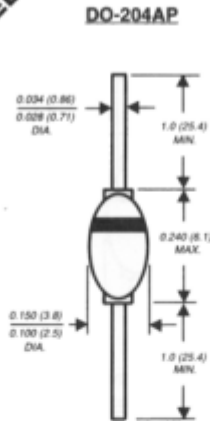

Dimensions in inches and (millimeters)

\* Braised-lead assembly is covered by Patent No. 3,930,306

### FEATURES

- ◆ Specially designed for clamping circuits in horizontal deflection systems and damper applications
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ 2.0 Ampere operation at  $T_A=50^{\circ}\text{C}$  with no thermal runaway
- ◆ Typical  $I_R$  less than  $0.1\mu\text{A}$
- ◆ Hermetically sealed package
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ High temperature soldering guaranteed:  $350^{\circ}\text{C}/10$  seconds,  $0.375"$  (9.5mm) lead length, 5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-204AP solid glass body  
**Terminals:** Solder plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.02 ounce, 0.56 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^{\circ}\text{C}$  ambient temperature unless otherwise specified.

	SYMBOLS	CG2	DG2	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	1400	1500	Volts
Maximum RMS voltage	$V_{RMS}$	980	1050	Volts
Maximum DC blocking voltage	$V_{DC}$	1400	1500	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=50^{\circ}\text{C}$	$I_{(AV)}$	2.0		Amps
Peak forward surge current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	40.0		Amps
Maximum instantaneous forward voltage at 2.0A	$V_F$	1.1		Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^{\circ}\text{C}$ $T_A=100^{\circ}\text{C}$	$I_R$	5.0 100.0		$\mu\text{A}$
Maximum full load reverse current full cycle average 0.375" (9.5mm) lead length at $T_A=100^{\circ}\text{C}$	$I_{R(AV)}$	200.0		$\mu\text{A}$
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	15.0	20.0	$\mu\text{s}$
Typical junction capacitance (NOTE 2)	$C_J$	15.0		pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	55.0		$^{\circ}\text{C}/\text{W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +175		$^{\circ}\text{C}$

**NOTES:**

- (1) Measured with  $I_F=0.5\text{A}$ ,  $I_R=50\text{mA}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

**RATINGS AND CHARACTERISTIC CURVES CG2 AND DG2**

