

Bridge Rectifier

GBPC3506

600V / 35A

DATASHEET

from

www.web-bcs.com

OEM – General Semiconductor

Source: General Semiconductor Databook 1998

GBPC12, 15, 25 AND 35 SERIES

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

Reverse Voltage - 50 to 1000 Volts Current Voltage - 12.0 to 35.0 Amperes

GBPC - W Wire leads



GBPC - Standard



FEATURES

- ◆ The plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ This series is UL recognized under component index, file number E54214
- ◆ Integrally molded heatsink provides very low thermal resistance for maximum heat dissipation
- ◆ Universal 3-way terminals; snap-on, wire wrap-around, or P.C.B. mounting
- ◆ High forward surge current capabilities
- ◆ Glass passivated chip junctions
- ◆ Typical I_R less than 0.3μA
- ◆ High temperature soldering guaranteed:
260°C/10 seconds at 5lbs. (2.3 kg) tension

MECHANICAL DATA

Case: Molded plastic with heatsink integrally mounted in the bridge encapsulation

Terminals: Either plated 0.25" (6.35mm). Faston lugs or plated copper leads 0.040" (1.02mm) diameter. Suffix letter "W" added to indicate leads (e.g. GBPC12005W).

Mounting Position: See NOTE 3

Polarity: Polarity symbols molded on body

Mounting Torque: 20 in. - lb. max. **Weight:** 0.53 ounce, 15 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | | GBPC12, 15, 25, 35 | | | | | | | | |
|---|--|--------------------|-----|-----|-----|----------------------------------|-----|-----|------|--------------------|
| | | SYMBOLS | 005 | 01 | 02 | 04 | 06 | 08 | 10 | UNITS |
| Maximum repetitive peak reverse voltage | | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS voltage | | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC blocking voltage | | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | Volts |
| Maximum average forward rectified output current (SEE FIG. 1) | GBPC12 GBPC15 GBPC25 GBPC35 | $I_{(AV)}$ | | | | 12.0 15.0 25.0 35.0 | | | | Amps |
| Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) | GBPC12 GBPC15 GBPC25 GBPC35 | I_{FSM} | | | | 200.0 300.0 300.0 400.0 | | | | Amps |
| Rating (non-repetitive, for t greater than 1ms and less than 8.3ms) for fusing | GBPC12 GBPC15 GBPC25 GBPC35 | I^2t | | | | 160.0 375.0 375.0 660.0 | | | | A ² sec |
| Maximum instantaneous forward voltage drop per leg at | GBPC12 $I_F=6.0A$ GBPC15 $I_F=7.5A$ GBPC25 $I_F=12.5A$ GBPC35 $I_F=17.5A$ | V_F | | | | 1.1 | | | | Volts |
| Maximum reverse DC current at rated DC blocking voltage per leg | $T_A=25^\circ C$ $T_A=125^\circ C$ | I_R | | | | 5.0 500.0 | | | | μA |
| RMS isolation voltage from case to leads | | V_{ISO} | | | | 2500.0 | | | | Volts |
| Typical junction capacitance per leg (NOTE 1) | | C_J | | | | 300.0 | | | | pF |
| Typical thermal resistance per leg (NOTE 2) | GBPC12-25 GBPC35 | $R_{\theta JC}$ | | | | 1.9 1.4 | | | | °C/W |
| Operating junction storage temperature range | | T_J, T_{STG} | | | | -55 to +150 | | | | °C |

NOTES:

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (2) Thermal resistance from junction to case per leg
- (3) Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #10 screw

RATINGS AND CHARACTERISTICS CURVES GBPC12, 15, 25 AND 35 SERIES

FIG. 1 - MAXIMUM OUTPUT RECTIFIED CURRENT

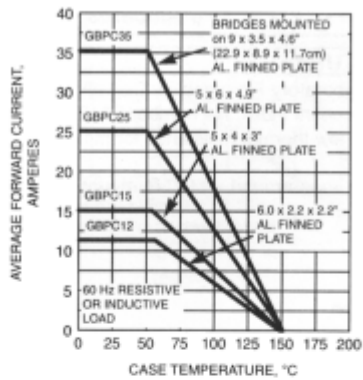


FIG. 2 - MAXIMUM OUTPUT RECTIFIED CURRENT

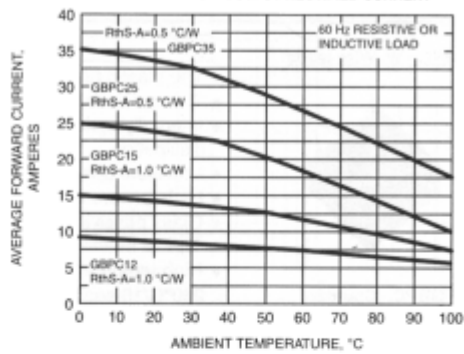


FIG. 3 - MAXIMUM POWER DISSIPATION


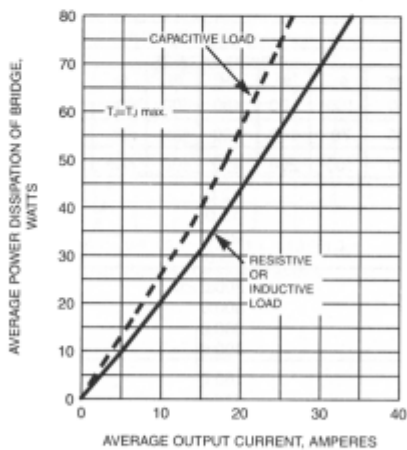


FIG. 4 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

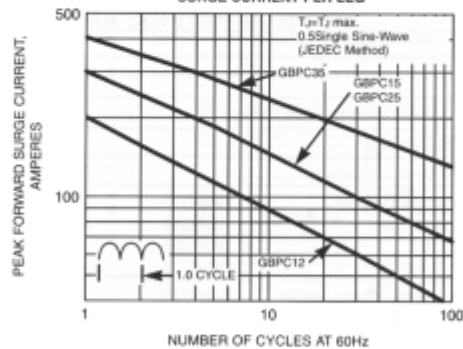

RATINGS AND CHARACTERISTICS CURVES GBPC12, 15, 25 AND 35 SERIES

FIG. 5 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG



FIG. 6 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

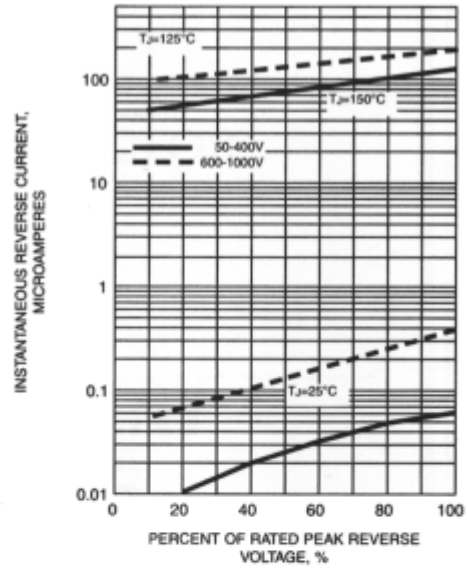


FIG. 7 - TYPICAL JUNCTION CAPACITANCE PER LEG



FIG. 8 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

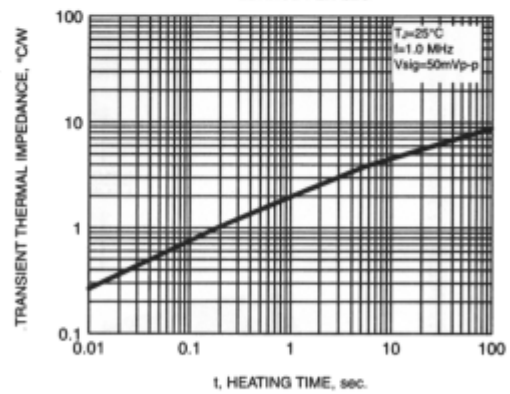


FIG. 9


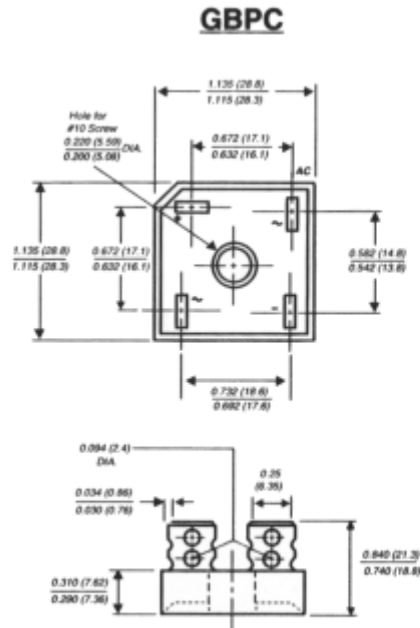


FIG. 10

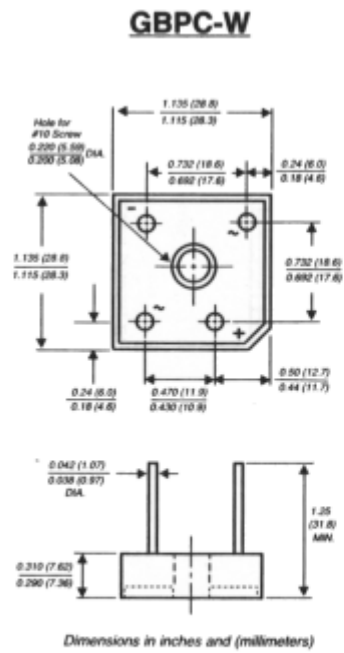

NOTES:

- (1) Corrosion resistant terminals designed with 0.25" female quick connectors for wrap or snap-on
- (2) A thin film of silicone thermal compound is recommended between the bridge case and mounting surface for improved thermal conduction